

ADDITIVE INJECTION PUMP & CONTROL MODULE PACKAGE

The Diamond Key International Additive injection module is designed for safe and efficient petrochemical fuel additive product supply to multiple additive injectors for loading terminals and pipe lines.

The package houses the following equipment fully integrated and factory tested.

- Steel galvanized frame.
- Positive displacement pump / pumps
- Exd/Exe electric motor.
- Stainless Steel suction piping.
- Stainless Steel discharge piping.
- Pump discharge check valve.
- Discharge pressure gauge.
- Suction inlet strainer.
- Pump Isolation Valves.
- Full flow external pump by-pass valve.
- Exd junction box containing:
Pump start contactors and controls
(mounted in the Exd)


Maximum Operating Pressure:

1100 Kpa

Maximum Flow Rate:

28 Lpm per pump

Dimensions:

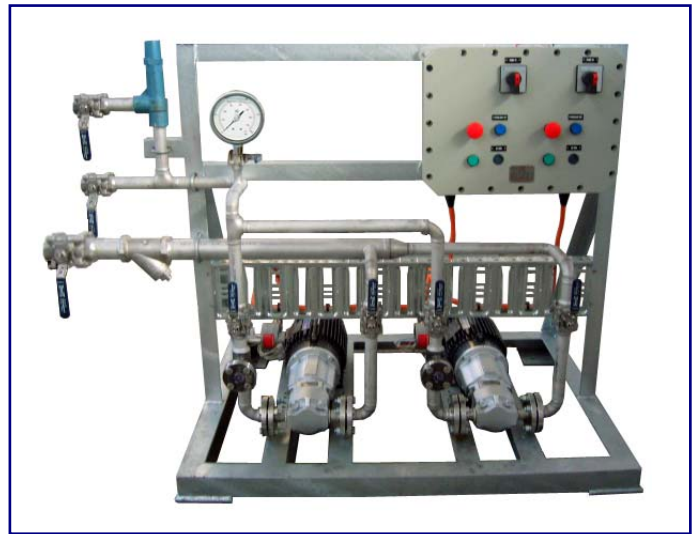

Power Consumption:

4.4 kw

Supply Power:

3 Phase 380v to 415v

Weight:

290 kg

